



AUN/SEED-Net



8th **AUN/SEED-Net** REGIONAL CONFERENCE ON ELECTRICAL AND ELECTRONICS ENGINEERING

Envision, Enable, and Empower
Smarter and Resilient Societies

co-located with

11th **ERDT Conference** on Semiconductor and Electronics, Information and Communications Technology and Energy

16-17 November 2015
Metro Manila, Philippines



**Proceedings of the 8th AUN/SEED-Net RCEEE 2015 and 11th ERDT Conference
on Semiconductor and Electronics, Information and Communications Technology, and Energy**

Editors:

Dr. Joel Joseph S. Marciano Jr.

Dr. Jhoanna Rhodette I. Pedrasa

Dr. Rhandley D. Cajote

© Copyright 2015 by the Electrical and Electronics Engineering Institute, College of Engineering, University of the Philippines Diliman, Engineering Research and Development for Technology, and ASEAN University Network/Southeast Asia Engineering Education Development Network (AUN/SEED-Net).

All rights reserved.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form without the consent of the editors of the Proceedings of the 8th AUN/SEED-Net RCEEE 2015 and 11th ERDT Conference on Semiconductor and Electronics, Information and Communications Technology, and Energy.

ISBN: 978-616-406-075-3

Published by: ASEAN University Network / Southeast Asia Engineering Education Development Network
(AUN/SEED-Net) JICA Project
Faculty of Engineering, Bldg. 2
Chulalongkorn University, Bangkok
Thailand 10330

Printed in the Philippines by: ERZALAN PRINTING PRESS
45 Cotabato Street, Luzviminda Village, Batasan Hills, Quezon City, Philippines

8th AUN/SEED-Net Regional Conference on Electrical and Electronics Engineering 2015

co-located with

11th ERDT Conference on Semiconductor and Electronics, Information and Communications Technology, and Energy

Envision, Enable and Empower Smarter and Resilient Societies

Published by: ASEAN University Network / Southeast Asia Engineering Education
Development Network (AUN/SEED-Net) in partnership with Engineering Research and
Development for Technology (ERDT) and University of the Philippines Diliman.

© Copyright 2015

No part of this publication may be reproduced without the consent of the editors of the
Proceedings of the 8th AUN/SEED-Net Regional Conference on Electrical and Electronics
Engineering 2015 and 11th ERDT Conference on Semiconductor and Electronics, Information
and Communications Technology, and Energy.

ISBN: 978-616-406-075-3

INDOOR PHOTOVOLTAIC ENERGY HARVESTER FOR BATTERY RECHARGING AND WIRELESS SENSOR NETWORKS APPLICATION IMPLEMENTED IN 90NM CMOS TECHNOLOGY

Rochelle M. Sabarillo¹ * and Chinet O. Mocerro²

1 COE-EECE Department, Mindanao State University – Iligan Institute of Technology, PHILIPPINES.

2 SET-ELET Department, Mindanao State University – Iligan Institute of Technology, PHILIPPINES.

*E-mail: rochellesabarillo@gmail.com

ABSTRACT

Wireless sensor networks (WSNs) have the potential to provide better quality data than single or small numbers of individual sensors in applications such as natural and built environmental monitoring, process monitoring, security and surveillance which is widely used in hospitals, factories and other industrial establishments. In order to be cost effective in many applications, the sensor nodes must be low cost and low maintenance. This presents challenges in terms of sensor calibration, packaging for survival in harsh environments and, particularly, the efficient supply and utilization of power.

While the performance of battery technology is gradually improving and the power requirements of electronics are generally dropping, these are not keeping pace with the increasing demands of many WSN applications. For this reason, there has been considerable interest in the development of systems capable of extracting useful electrical energy from existing environmental sources. Such sources include ambient light, thermal gradients, vibration and other forms of motion. Since most of the wireless sensors are found in building environments, the advantage of using an efficient indoor photovoltaic energy harvesting system in these applications has become increasingly apparent.

This paper presents an indoor photovoltaic energy harvesting system which utilizes a 500mV single unit solar cell operating under room lighting illumination. This voltage supplies the input stage of the whole system including the bootstrapped ring oscillator and self-V_{th}-cancellation differential rectifier, whose output frequency is 27MHz, which in turn generates the supply for the low-dropout regulator (LDO) and the charging circuit of the rechargeable NiMH battery of the output stage. The regulated output voltage from the LDO is equal to 1V with load current ranging from 50 μ A to 300 μ A which is suitable for wireless sensor networks application. The whole system is implemented using 90nm CMOS technology to minimize area and power consumption which results to a more efficient design architecture.

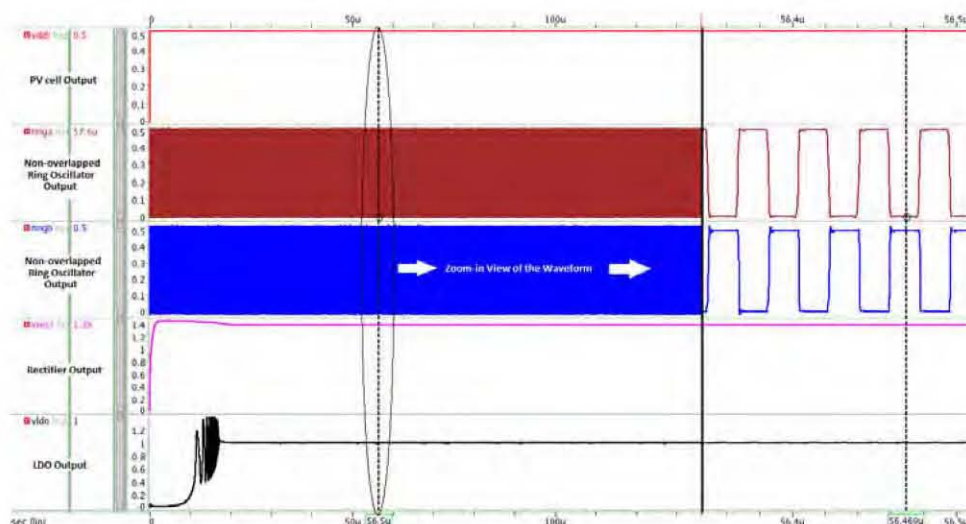


Figure 1. Output simulation results of indoor photovoltaic energy harvester.

