

Binary Oxide Photoelectrode with Coffee Natural Dye Extract for DSSC Application

Moe Moe Aye¹, Than Than Win², Yin Maung Maung³, and Ko Ko Kyaw Soe⁴

¹Assistant Lecturer, Department of Physics, University of Yangon, Myanmar

²Lecturer, Department of Physics, University of Yangon, Myanmar

³Lecturer, Department of Physics, University of Yangon, Myanmar

⁴Pro-rector, Meiktila University, Myanmar

Copyright © 2014 ISSR Journals. This is an open access article distributed under the *Creative Commons Attribution License*, which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

ABSTRACT: SnO₂ (x)- ZnO(1-x) binary system with two different SnO₂ composition (x= 3, 5 mol%) were prepared by solid state reaction at high temperature employed as photoanode for dye sensitized solar cell(DSSC) fabrication. SnO₂-ZnO binary oxide was characterized by X-ray diffraction(XRD) and UV-VIS Spectroscopy to examine their structure and optical properties. High performance carbon electrode was prepared onto glass and used as counter electrode. Coffee powder was used as natural dye-sensitizer. The improvement in device efficiency was achieved by larger SnO₂ composition. The overall power conversion efficiency increased from 0.18% for SnO₂:ZnO (3:97mol %) device to 0.26% for a device with SnO₂:ZnO (5:95mol %) photoanode.

KEYWORDS: Binary oxide, XRD, DSSC, conversion efficiency, fill factor.

1 INTRODUCTION

A dye-sensitized solar cell (DSSC, DSC) is a low-cost solar cell belonging to the group of thin film solar cells [1,2]. It is based on a semiconductor formed between a photo sensitized anode and an electrolyte, a photoelectrochemical system. The DSSC has a number of attractive features; it is simple to make using conventional roll-printing techniques, is semi-flexible and semi transparent which offers variety of uses not applicable to glass-based systems, and most of the materials used are low-cost[1-5]. In the fabrication of DSSCs, the choice of the metal oxide material and the transparent electrode is crucial to obtain efficient light harvesting, charge separation, and extraction. TiO₂ has been widely studied for efficient DSSCs [6-8], and a power conversion efficiency of 11% was reported [9]. Moreover, ZnO nanoparticles were investigated for DSSCs [9-15]. DSSCs fabricated using ZnO nanoparticles have achieved the second highest efficiency after TiO₂ [12-16]. Another crucial parameter in the fabrication of DSSCs is the sensitizing dye. Due to the dye significant role, considerable interest has been directed towards the development and improvement of new families of organic dyes and of metal complexes[11-15]. These complexes have a number of interesting features such as good absorption, long excited lifetime, and highly efficient metal-to-ligand charge transfer. The disadvantages of these complexes are high cost and sophisticated preparation techniques. Therefore, alternative organic dyes such as natural dyes have been studied intensively[13-18]. The main features of natural dyes are their availability, environmental friendly and low in cost[16-18]. In this research, SnO₂-ZnO binary oxide transparent films were prepared by spin-coating technique. Structure, optical and photovoltaic properties of SnO₂:ZnO binary oxide photoelectrode with the coffee natural dye extract (DSSC) was studied.

2 EXPERIMENTAL PROCEDURE

SnO_2 and ZnO were separately observed by XRD to examine their purification. $\text{SnO}_2(x)$ and $\text{ZnO}(1-x)$ ($x = 3, 5$ mol%) were mixed and ball-milled for 20 h to get homogeneous powder. It was mesh-sieve with 3-step mesh to choose the small scale and uniform powder. It was annealed at 800°C for 1 h and SnO_2 - ZnO composite powder was successfully formed. Flow chart of experimental procedure for SnO_2 - ZnO binary oxide powder was shown in Fig 1. After that SnO_2 - ZnO binary oxide powder, 3 ml of methoxyethanol ($\text{CH}_3\text{OCH}_2\text{CH}_2\text{OH}$) was stirred with magnetic stirrer and these SnO_2 - ZnO binary oxide solution was refluxed at 100°C by water bath for 1 h. After cool down at room temperature SnO_2 - ZnO binary oxide paste was formed. Finally SnO_2 - ZnO binary oxide paste was coated on glass substrate by spin coating. The flow chart of experimental procedure for SnO_2 - ZnO binary oxide film was shown in Fig 2.



Fig 1 Flow chart of experimental procedure for SnO_2 - ZnO binary oxide powder

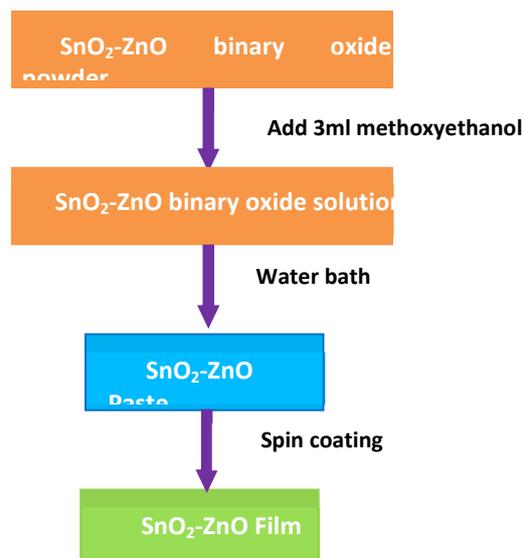


Fig 2 Flow chart of experimental procedure for SnO_2 - ZnO binary oxide film

2.1 PREPARATION OF NATURAL DYE-SENSITIZER

Coffee seeds were used as natural dye-sensitizer in this work. Firstly, coffee seeds were ground in grinding machine and obtained the coffee powder. The powder was squeezed by blander for fine powder formation. And then, acetone was added into specimen for coffee solution and it was sieved by filter paper. After sieving, coffee solution was annealed with heat controller at 100 °C for 20 min. After cooling, it was sieved with the filter paper and coffee solution was obtained. Flow chart of experimental procedure for coffee natural dye sensitizer in pH level 5 was shown in Fig 3. The UV-Vis Spectroscopy was used to examine the optical properties of coffee solution. Fig 4 showed absorption properties of coffee dye extract solution. It could absorb near visible region and the optical band gap values obtained was 4.09 eV.



Fig 3 Flow chart of experimental procedure for coffee natural dye-sensitizer

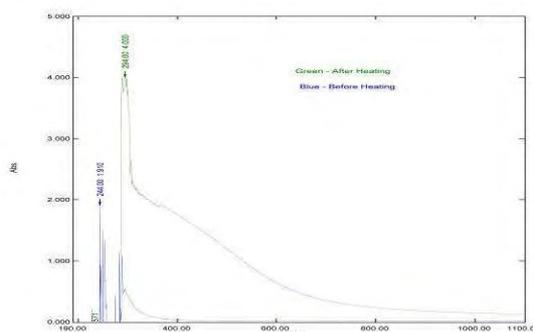


Fig 4 Absorption spectrum of coffee dye extract in pH level 5

2.2 PREPARATION OF DSSC (DYE-SENSITIZED SOLAR CELL)

The black carbon was dispersed into the mixture solution of water and ethanol. After dispersion, carboxymethyl cellulose was also added and adhesive carbon paste was formed. It was coated onto glass substrate and annealed at 80 °C for 30 min. The glass plate was dried on the hot plate for 30 min. By this time, the coffee solution was put in the dish. The SnO₂-ZnO

binary oxide coated slide should have soaked in this solution for 1 h and 30 min. It was dried on the hot plate for 1 h at 100°C, the slider was ready for use. Iodine solution was prepared for electrolyte. Carbon coated glass plate was placed the face downward on the SnO₂-ZnO binary oxide coated glass plate. The two glass plate must be slightly offset. Binder clips were used to keep the two slides together. One drop of a liquid iodine solution was then added between the slides. Capillary action will strain the entire inside of the slides. In this study, the cell was measured both the voltage and current output of the cell under halogen lamp.

3 RESULTS AND DISCUSSION

3.1 XRD ANALYSIS

Fig 5 (a-b) showed the XRD spectrum of SnO₂-ZnO binary oxide powder at 3:97 mol% and 5:95 mol%. The upper site of XRD profile was represented the observed SnO₂-ZnO spectrum while the lower site indicated the JCPDS (Joint Committee on Powder Diffraction Standard). All of diffraction peaks were consistent with hexagonal wurtzite structure for ZnO and tetragonal structure for SnO₂. Thus ZnO and SnO₂ were examined to be composite binary oxide form at both compositions. Table 1, showed the value of lattice parametre, bond length, hexagonality and crystallite size data of SnO₂-ZnO binary oxide powder.

Table 1. Lattice parametre, Bond Length, Hexagonality and Crystallite size data of SnO₂:ZnO Binary Oxide Powder

Specimen	Lattice Parametre		Bond Length (Å)	Hexagonality (c/a)	Crystallite size (nm)
	a (Å)	c (Å)			
SnO ₂ :ZnO (3:97 mol %)	5.74	4.27	3.64	0.74	70.31
SnO ₂ :ZnO (5:95 mol %)	5.45	4.36	3.36	0.79	63.94

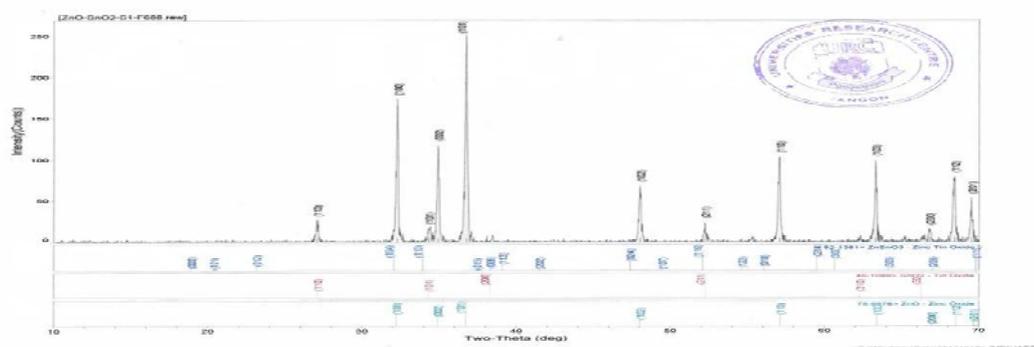


Fig 5 (a) XRD spectrum of SnO₂:ZnO (3:97mol %) binary oxide powder

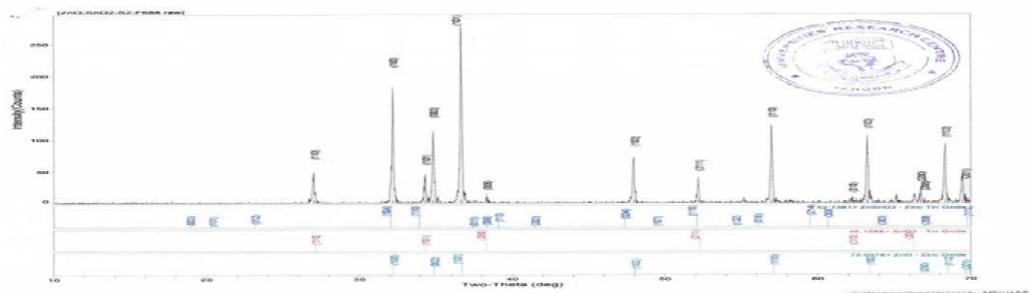


Fig 5 (b) XRD spectrum of SnO₂:ZnO (5:95 mol%) binary oxide powder

3.2 OPTICAL PROPERTIES

Fig 6(a-b) illustrated the absorption spectra for SnO₂-ZnO binary oxide films. The absorbance was over 60% in the visible region for all samples. It could be seen from figure that absorption edge near 300 nm. The absorption edge shifted to longer wavelength as the various SnO₂-ZnO compositions. The optical band gap values obtained were summarized in Table 2.

Table 2. Optical Band Gap of SnO₂-ZnO binary oxide

Specimen	Optical Band Gap (eV)
SnO ₂ :ZnO (3:97 mol %)	3.91
SnO ₂ :ZnO (5:95 mol %)	4.08

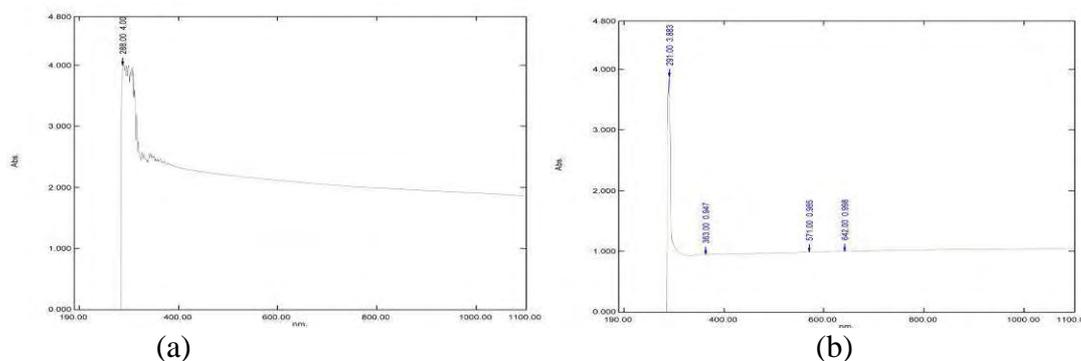


Fig 6 Absorption spectrum for SnO₂:ZnO(a) 3:97 mol % (b) 5:95 mol % binary oxide films

3.3 PHOTOVOLTAIC PROPERTIES

Fig 7 (a-b) , showed the I-V curves of SnO₂-ZnO binary oxide photoelectrode DSSC cells under illumination(8104 lux). The summarized photovoltaic parameters for the two DSSCs were listed in Table 3.

Table 3 Photovoltaic parameters of SnO₂-ZnO photoelectrode with coffee dye sensitizer extract

Specimen	I _{sc} (mA)	V _{oc} (mV)	FF	η(%)
SnO ₂ :ZnO (3:97 mol %)	0.08	54	0.75	0.18
SnO ₂ :ZnO (5:95 mol %)	0.06	105	0.73	0.26

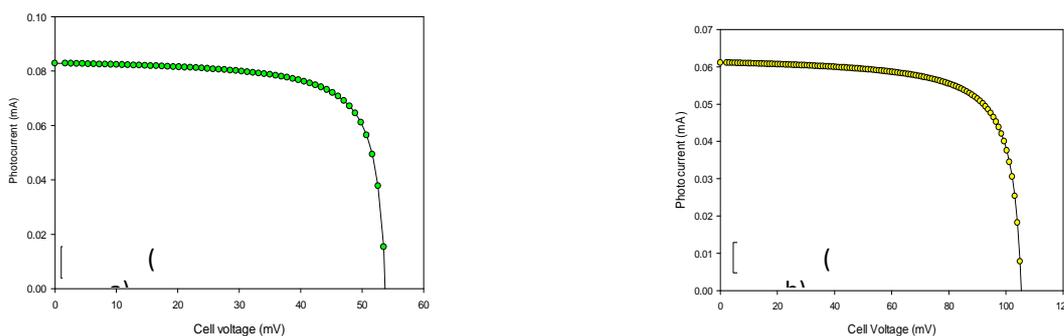


Fig 7 I-V curve of SnO₂:ZnO (a) 3:97 mol% and (b) 5:95 mol% binary oxide DSSC

4 CONCLUSION

SnO₂-ZnO binary oxide transparent films were prepared by spin-coating technique. From the results of powder analysis, SnO₂-ZnO binary oxide fine powder was formed at given temperature. The optical band-gap of SnO₂-ZnO binary oxide photoelectrode was same as the coffee dye extract for SnO₂-ZnO (5:95 mol %). Therefore, the efficiency of SnO₂-ZnO (5:95 mol %) was examined to be larger than that of SnO₂-ZnO (3:97 mol %). It might be attributed to the larger amount of SnO₂ into ZnO. The results showed that SnO₂-ZnO and coffee natural dye exhibited a promising application in the preparation of dye sensitized solar cell.

ACKNOWLEDGEMENTS

This research was totally implemented at Department of Physics, University of Yangon, Myanmar (2013-2014).

REFERENCES

- [1] Tao-Hua Lee, Hung-Jue Sue and Xing Cheng, "Solid-state dye-sensitized solar cells based on ZnO nanoparticle and nanorod array hybrid photoanodes," *Nanoscale Res Lett.*, vol.6, no.1, pp. 517, 2011.
- [2] S. Viswanathan Saji, M. Pyo, "Dye sensitized solar cell of TiO₂ nanoparticle/ nanorod composites prepared via low-temperature synthesis in oleic acid," *Thin Solid Films*, vol. 518, pp 6542-6546, 2010.
- [3] B. Yang, Peterxian Feng, Ashok Kumar, R. S. Katiyar and Marc Achermann, "Structural and optical properties of N-doped ZnO nanorod arrays," *J. Phys. D: Appl. Phys.*, vol. 42, pp. 195402, 2009.
- [4] Nanda Shakti, Sunita Kumari, P.S. Gupta, "Structural, optical and electrical properties of ZnO nanorod array prepared by hydrothermal process," *Journal of Ovonic Research*, vol. 7, no. 3, pp. 51 - 59, 2011.
- [5] Michael Gratzel, 'Dye sensitized solar cells', *Journal of Photochemistry and Photobiology C: Photochemistry Reviews*, vol.4, pp. 145, 2003.
- [6] M. Izaki, T. Shinagawa, K. T. Mizuno, Y. Ida, M. Inaba and A. Tasaka, "Electrochemically constructed p-Cu₂O/n-ZnO heterojunction diode for photovoltaic effect", *J. Phys. D: Appl. Phys.*, vol. 40, pp. 3326-3329, 2007.
- [7] A. Alkaya, R. Kaplan, H. Canbolat and S. S. Hegedus, "A comparison of fill factor and recombination losses in amorphous silicon solar cells on ZnO and SnO₂", *Renewable Energy*, vol. 34, no. 6, pp. 1595-1599, 2009.
- [8] S.Ying Lan, Bian Ji-Ming, Li Qing-Wei and Luo Ying-Min, "Effects of substrate, morphology and optical properties of vertically aligned ZnO nanorod arrays grown by low temperature CBD method", *Journal of Inorganic Materials*, vol. 25, no. 10, pp. 24, 2010.
- [9] P. Gowthaman, M. Saroja, M. Venkatachalam, J. Deenathayalan and T. S. Senthil, "Structural and optical properties of ZnO nanorods prepared by chemical bath deposition method", *Australian Journal of Basic and Applied Sciences*, vol. 5, no. 11, pp. 1379, 2011.

- [10] Katsunori Takahashi, Ying Wang, and Guozhong Cao, "Growth and electrochromic properties of single-crystal V2O5 nanorod arrays", *Appl. Phys. Lett.*, vol. 86, pp. 053102, 2005.
- [11] Sufeng Wei, Jianshe Lian, Hua Wu, "Annealing effect on the photoluminescence properties of ZnO nanorod array prepared by a PLD-assistant wet chemical method", *Materials Characterization*, vol. 61, no. 11, pp. 1239-1244, 2010.
- [12] Kandasami Asokan, Jaeyoung Park, Sun-Woo Choi and Sang Sub Kim, "Nanocomposite ZnO-SnO2 Nanofibers Synthesized by Electrospinning Method", *Nanoscale Research Letters*, vol. 5, no. 4, pp. 747-52, 2010.
- [13] Lihui Zhang, Heqing Yang and Li Li, "Synthesis and characterization of core/shell-type ZnO nanorod/ ZnTe nanoparticle composite by a one step hydrothermal route", *Material chemistry and physics*, vol. 120, pp. 526-531, 2010.
- [14] Liu Run-Hua, Zhang Sen, Xia Xin-Yuan, Yun Da-Qin, Bian Zu-Qing and Zhao Yong-Liang, "DSSCs using a Nanoparticle/ Nanorod composite TiO2 film as a Photoelectrode", *Electrochemistry and new energy*, vol. 27, no. 7, pp. 1701-1706, 2011.
- [15] Hui Tong, Miki Inada, Yumi Tanaka, Naoya Enomoto and Junichi Hojo, "Dye Sensitized Solar Cells Based on ZnO Nanorod/TiO2 Nanoparticle Composite Films", *Materials Science Forum*, vol. 724, pp. 397-403, 2012.
- [16] Jae Young Park, Sang Sub Kim, "Growth of Nanograins in Electrospun ZnO Nanofibers" *Journal of the American Ceramic Society*, vol. 92, no. 8, pp. 1691 - 1694, 2009.
- [17] Khaled Melghit, Moza S. Al-Rubaei and Issa Al-Amri, "Photodegradation enhancement of Congo red aqueous solution using a mixture of SnO2·xH2O gel/ZnO powder" , *Journal of Photochemistry and Photobiology A: Chemistry*, vol. 181, pp 137-141, 2006.
- [18] R. N. Mariammal, C. Stella, S. S. Kanmani, S. Umopathy, and K. Ramachandran, "ZnO nanorods/SnO2 nanoparticles based composites: Synthesis and characterization", *AIP Conference Proceedings*, vol. 1447, no. 1, pp. 391, 2012.