



**AUN/SEED-Net**



# 8<sup>th</sup> **AUN/SEED-Net** REGIONAL CONFERENCE ON ELECTRICAL AND ELECTRONICS ENGINEERING

Envision, Enable, and Empower  
Smarter and Resilient Societies

*co-located with*

# 11<sup>th</sup> **ERDT Conference** on Semiconductor and Electronics, Information and Communications Technology and Energy

**16-17 November 2015**  
**Metro Manila, Philippines**



**Proceedings of the 8<sup>th</sup> AUN/SEED-Net RCEEE 2015 and 11<sup>th</sup> ERDT Conference  
on Semiconductor and Electronics, Information and Communications Technology, and Energy**

Editors:

Dr. Joel Joseph S. Marciano Jr.

Dr. Jhoanna Rhodette I. Pedrasa

Dr. Rhandley D. Cajote

© Copyright 2015 by the Electrical and Electronics Engineering Institute, College of Engineering, University of the Philippines Diliman, Engineering Research and Development for Technology, and ASEAN University Network/Southeast Asia Engineering Education Development Network (AUN/SEED-Net).

All rights reserved.

No part of this publication may be reproduced, stored in a retrieval system, or transmitted in any form without the consent of the editors of the Proceedings of the 8<sup>th</sup> AUN/SEED-Net RCEEE 2015 and 11<sup>th</sup> ERDT Conference on Semiconductor and Electronics, Information and Communications Technology, and Energy.

ISBN: 978-616-406-075-3

Published by: ASEAN University Network / Southeast Asia Engineering Education Development Network  
(AUN/SEED-Net) JICA Project  
Faculty of Engineering, Bldg. 2  
Chulalongkorn University, Bangkok  
Thailand 10330

Printed in the Philippines by: ERZALAN PRINTING PRESS  
45 Cotabato Street, Luzviminda Village, Batasan Hills, Quezon City, Philippines

# **8<sup>th</sup> AUN/SEED-Net Regional Conference on Electrical and Electronics Engineering 2015**

co-located with

## **11<sup>th</sup> ERDT Conference on Semiconductor and Electronics, Information and Communications Technology, and Energy**

# Envision, Enable and Empower Smarter and Resilient Societies

Published by: ASEAN University Network / Southeast Asia Engineering Education  
Development Network (AUN/SEED-Net) in partnership with Engineering Research and  
Development for Technology (ERDT) and University of the Philippines Diliman.

© Copyright 2015

No part of this publication may be reproduced without the consent of the editors of the  
Proceedings of the 8<sup>th</sup> AUN/SEED-Net Regional Conference on Electrical and Electronics  
Engineering 2015 and 11<sup>th</sup> ERDT Conference on Semiconductor and Electronics, Information  
and Communications Technology, and Energy.

ISBN: 978-616-406-075-3

## A CROSS-LAYER ANALYTICAL MODEL OF COLLISION PROBABILITIES IN WIRELESS SENSOR NETWORKS

Vo Que Son\*


Telecommunication Department, Faculty of Electrical and Electronics Engineering,  
Ho Chi Minh City University of Technology, VIETNAM.  
E-mail: sonvq@hcmut.edu.vn

### ABSTRACT


Currently, there are many research studies that focus on analyzing the collision in MAC layer of Wireless Sensor Networks (WSNs). However, the analysis only considered the behaviors of MAC protocols without considering the traffic types of higher layers, especially the cross-effect of routing layer while in the practical deployment of WSNs, the trade-off between the network adaptation and the data throughput should be considered. Several research works [1] [2] [3] advance the global time synchronization and a distributed TDMA in [4] is proposed to mitigate these drawbacks, making TDMA more practical for WSNs. CSMA approach is widely used in WSNs due to the simple nature of this approach. Contending nodes take a random backoff and at the end of this period, they sense the channel for activity and transmit the data if the channel is idle. Otherwise, these nodes repeat the process. CSMA protocol in MAC layer has many advantages such as simplicity, flexibility, and robustness; hence, nodes can join or leave the network without any extra operations. In the field of routing for WSNs, there are two kind of routing: proactive and reactive routing. The proactive routing protocols [5] [6] [7] [8] are more popular due to several advantages: adaptation to the node mobility and use of WSNs are usually many-to-one data collection applications. In this kind of routing, there are two traffic types generated in the WSNs: routing traffic and data traffic. So far, the analysis of MAC protocols has not considered the relationship between collision of routing traffic and data traffic. Hence, the networks using proactive routing are not usually optimized in configuration. This can lead to the problem of poor performance for data transmission.

In this paper, we present an analytical model of collision probabilities which can be used to evaluate the performance of WSNs using proactive routing protocols. Moreover, in this model collision probabilities of separated traffic types such as data traffic and routing traffic are also analyzed to show the mutual impact between them. To target the generalization of this proposed analytical model, several parameters which are usually used in practical implementation of WSNs are investigated such as routing information forwarding rate, acknowledgement, and data rate.

Figure 1 shows the simulation result and analysis of collision probability versus number of neighbor nodes, where the beacon period is 8 seconds and the data period is 2 seconds. It can be seen that when a node has more neighbor nodes, the collision probability is higher due to the higher contention of beacons and data packets. With the number of neighbor nodes fewer than 8, the collision probability is smaller than 0.065. This figure also shows that the analytical model fits well with the simulation results because it considers most of issues such as synchronous beacon forwarding, overlapped slots, and acknowledgements. This result also leads to a practical proposal that designing the sizing of multi-hop sensor networks can reduce the collisions.

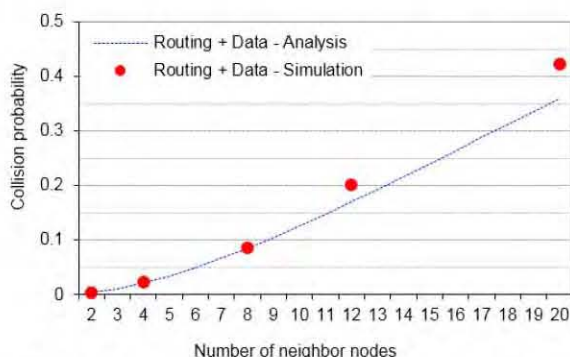

**Figure 1:** Collision probability versus number of neighbor nodes.

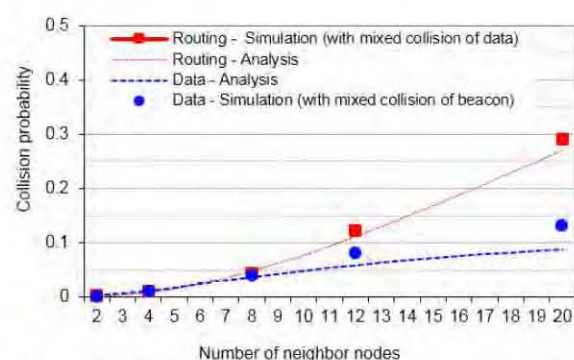

**Figure 2:** Separated collision probabilities of beacons and data packets.

